


77-418 Removal and installation of switch assembly on left soft top mount

Preliminary work:
Side wall panelling in left rear removed (68-456)

Operation no. of operation texts and work units or standard texts
and flat rates:

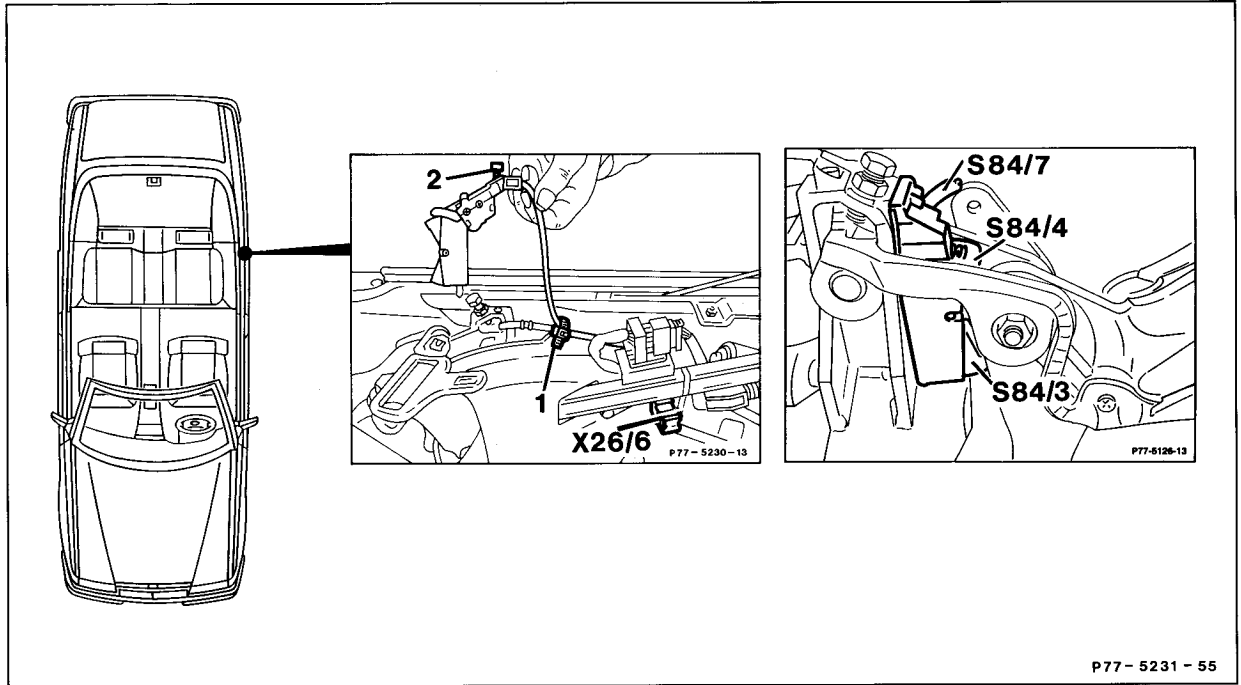

Cable strap (1)	open, close.
Plug connection (X23/6)	disconnect, connect.
Screw (2)	screw out, screw in.
Switch assembly (S84/3, 4, 7)	remove, install.