


82-7720 Removing and installing amplifier of sound system

Operation no. of operation texts and work units or standard texts and flat rates:

A. Sedan

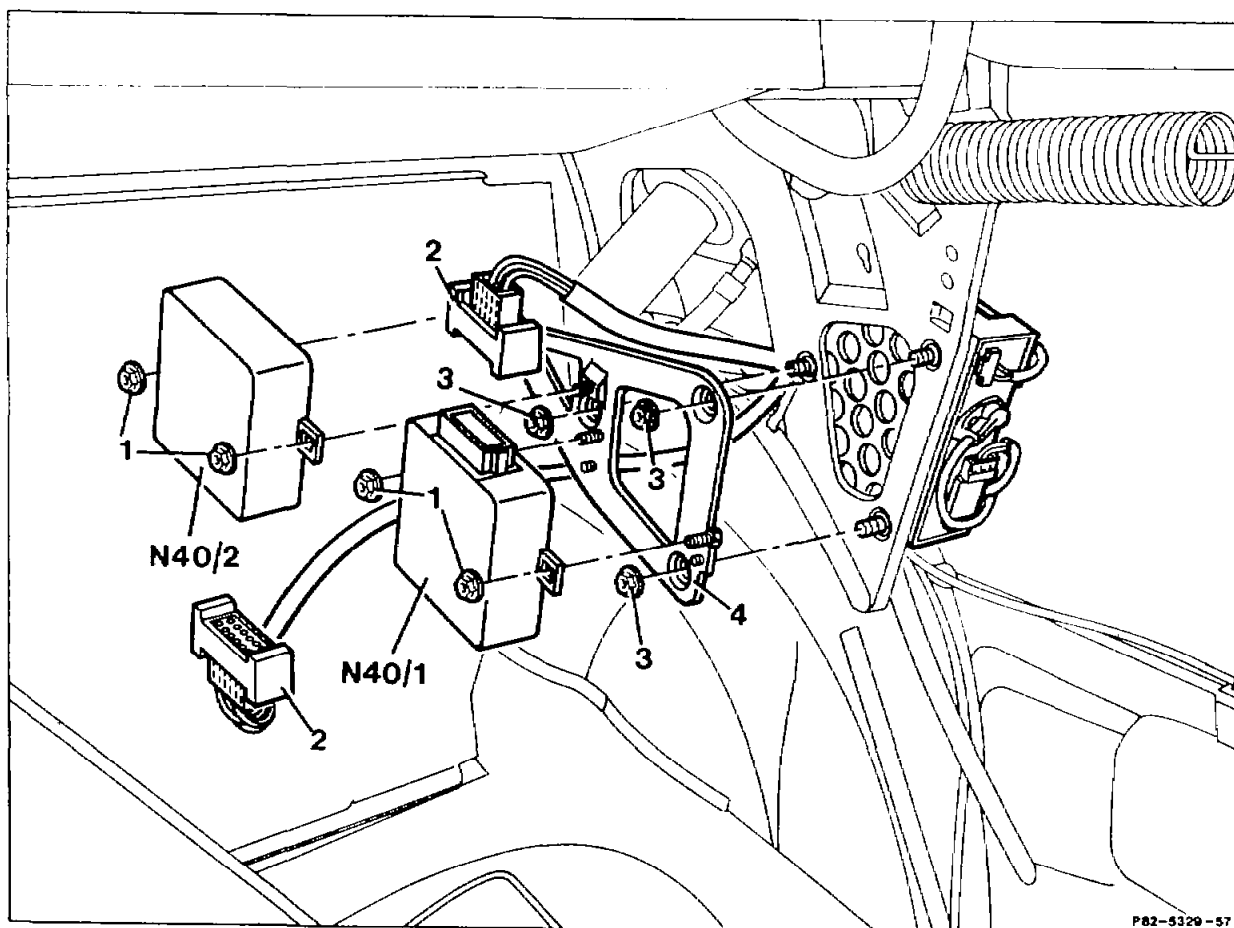


Ground cable at battery	disconnect, connect.
Right trunk trim panel	remove, install.
Nuts (1)	unscrew, screw in.
Control units (N40/1, N40/2)	remove, insert.
Coupling with locking bar (2)	release and take off, plug in and lock.
Nuts (3)	unscrew, screw in.
Bracket (4)	remove, insert.

B. Coupe

Preceding work:

Removing and installing receiver and amplifier (82-7605).

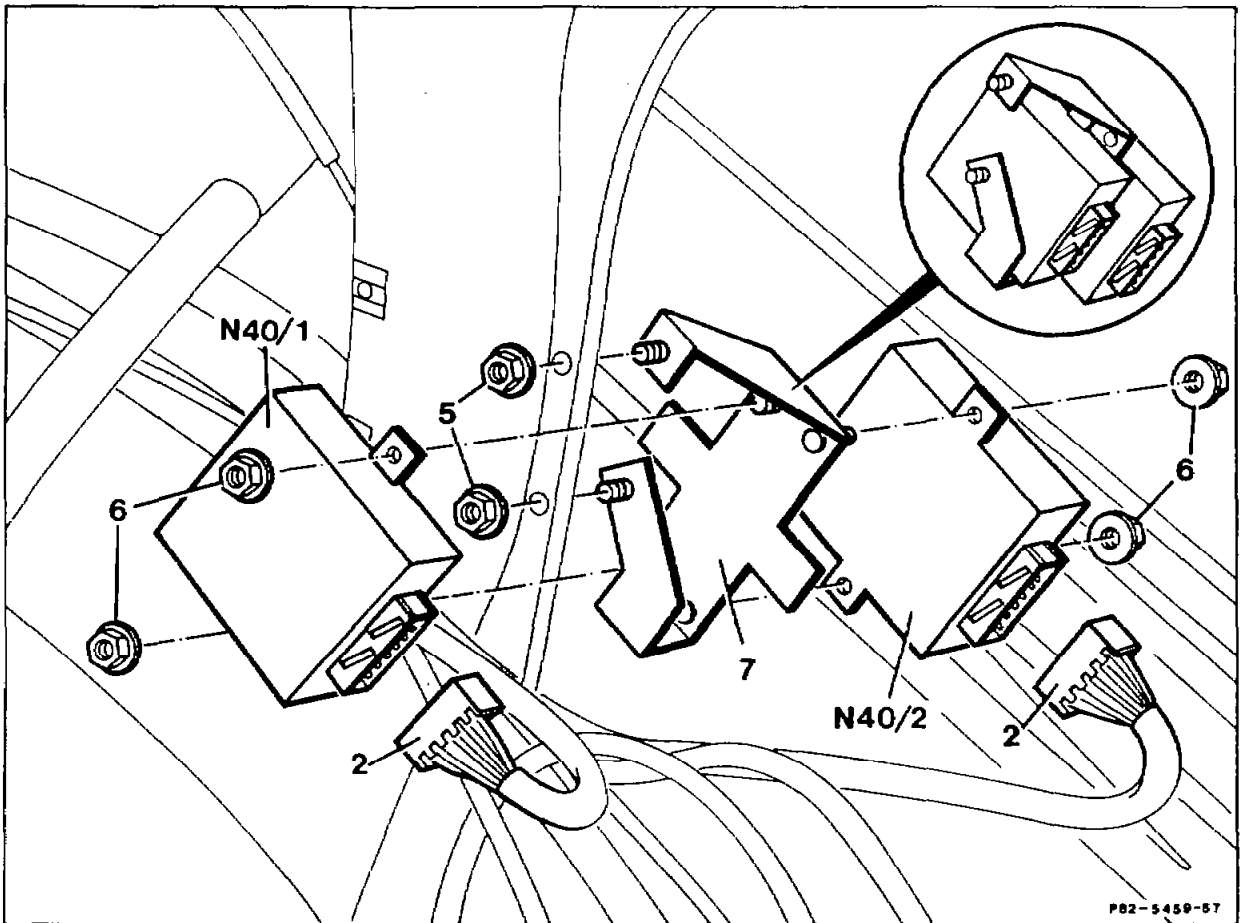

Coupling with locking bar (2)	release and take off, plug in and lock.
Nuts (5)	unscrew, screw in.
Control units (N40/1, N40/2) with bracket (7)	remove, insert.
Nuts (6)	unscrew, screw in.
Control units (N40/1, N40/2)	remove from bracket (7), insert.